


Cable Layout:

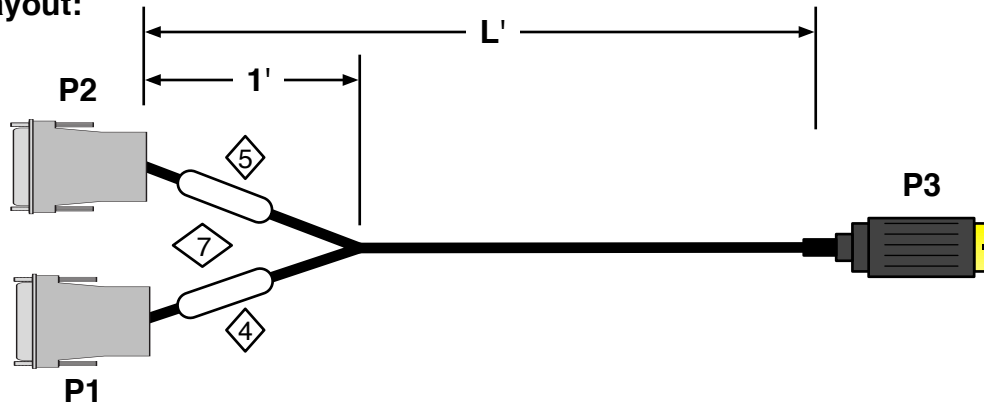


CA-D15M-D15M-Y-H10F-L-A_02

Length in feet


NOTES

1. P1 & P2: 15pin D-Sub male connectors with thumb screws. Apply strain relief.
2. P3: Hirose HR34B-12WPB-10S(71)
3. Use twisted pair audio cable: Canare MR202-4AT
4. Apply label "Channel A" with clear heatshrink
5. Apply label "Channel B" with clear heatshrink
6. Tie all shields to chassis ground pin of D-Sub connectors as indicated.
7. Apply black flex-braid sleeving to all legs of the cable with heatshrink at the cable splits.

Wiring Information:

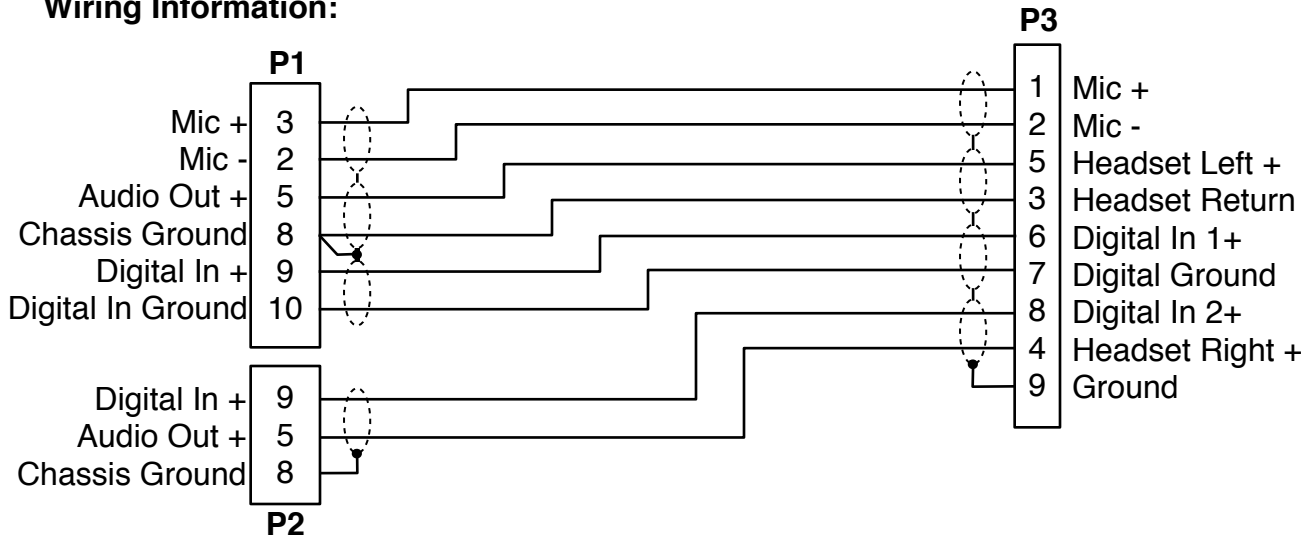

Rev	Date	Originator	Description
01	09/11/08	NAK	Original Release
02	04/14/09	CJA	Added Information Table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVSFW3
Title	Dual ACU to Stereo PTT
Dwg #	CA-D15M-D15M-Y-H10F-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-D15M-Y-H10F-L-A	02		