
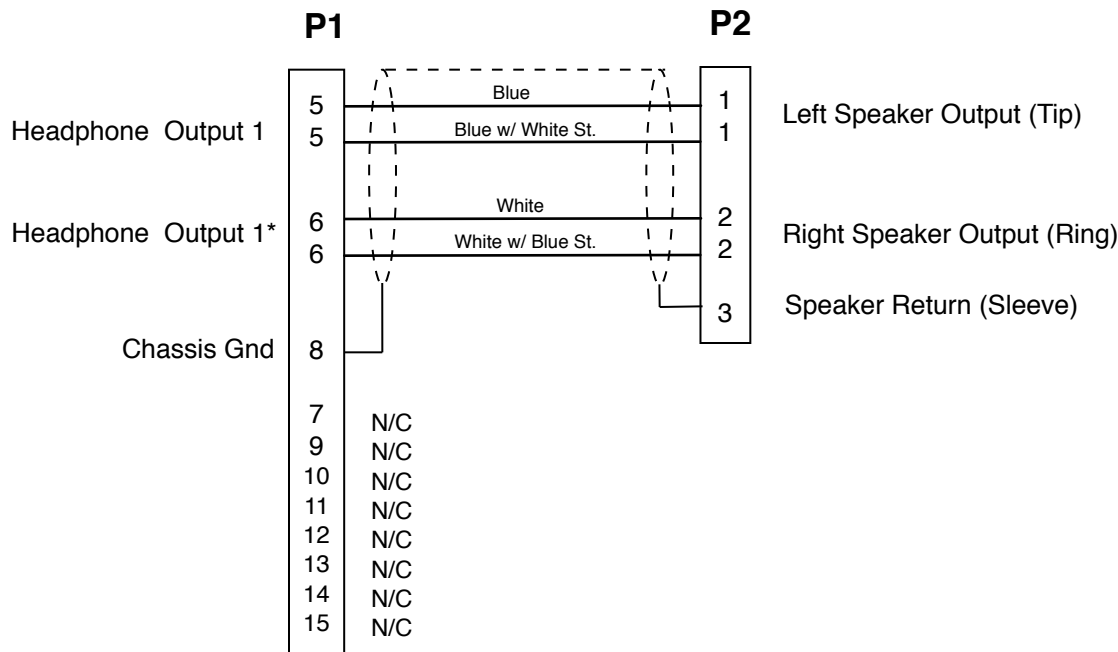



Length in Feet

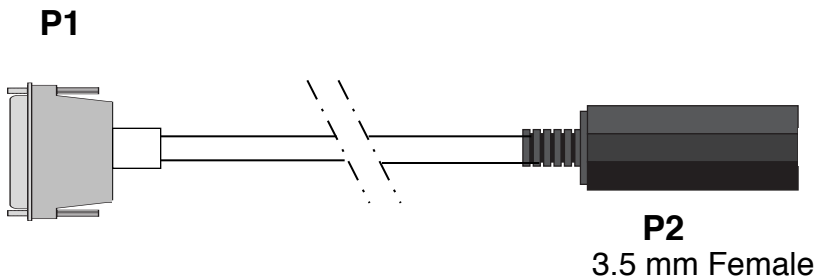

Assembly Notes

- (1) P1: Male, metal, DB-15 connector. Includes metal chrome backshell, strain relief & male screwlock assembly.
- (2) P2: Female, TRS 3.5mm stereo mini jack, strain relief.
- (3) Cable: Low capacitance, individually shielded, star quad, high flex, audio cable. Belden P/N: 1192A
- (4) Cable Length specified by value of L in P/N. Units are in feet.
- (5) Wire as shown in schematic - note drain wire connections.
- (6) Multiple conductor connections designated by repeat pin numbering

Rev	Date	Originator	Description
01	03-07-05	NAK	Original
02	04-14-09	CJA	Added Information Table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, - Iris to PC Speaker	
Dwg #	CA-D15M-P3F-L-A_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-P3F-L-A	02		