



Cable Layout:

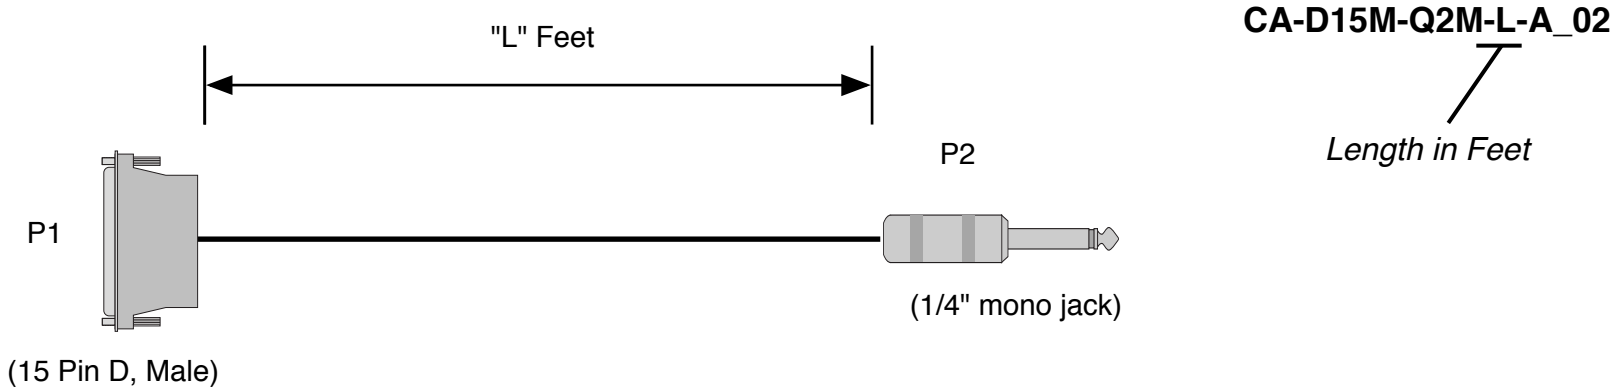


Wiring Information:

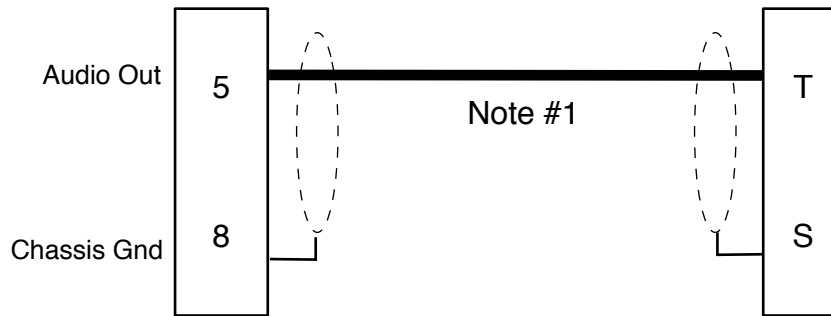

Notes:

1. All four conductors are connected to pin 5 and to the tip of the 1/4" jack connector
2. 15 pin DB-15 connector: Use high quality supplier such as AMP or equivalent.
3. High quality male 1/4" jack connector.
4. Use low capacitance, shielded, star quad, high flex audio cable.
5. Wiring and cable layout as shown.

Rev	Date	Originator	Description
01	10-6-06	NKW	Original release
02	4-14-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3
Title	Audio Cable, IRIS output to 1/4" jack
Dwg #	CA-D15M-Q2M-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Q2M-L-A	02		