



Cable Layout:

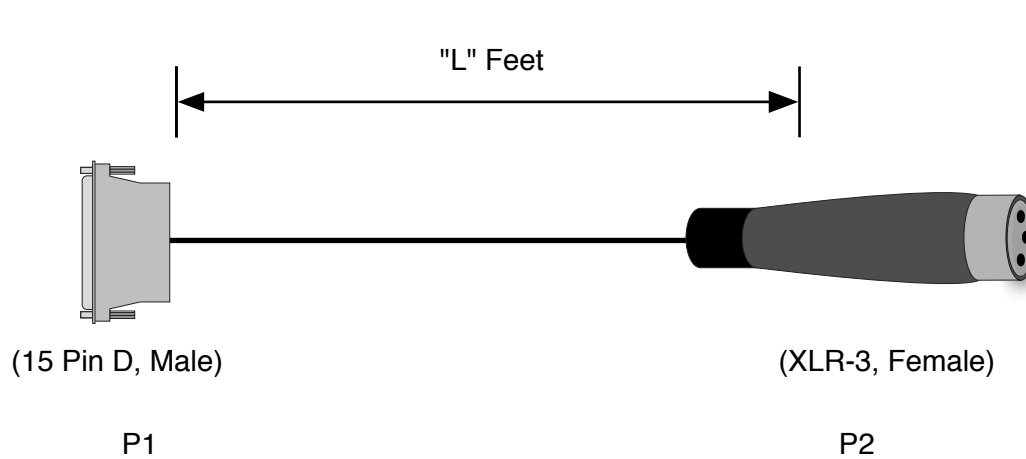

CA-D15M-X3F-L-A_02

Length in Feet


Wiring Information:

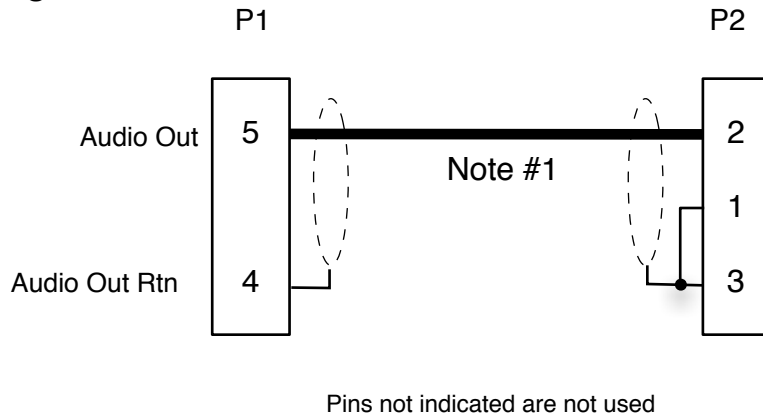

Notes:

1. All four conductors are connected to pin 5 and to pin 2 of the XLR connector. Shield used as signal return
2. 15 pin DB-15 male connector: Use high quality supplier such as AMP or equivalent.
3. Female XLR-3 connector
4. Use low capacitance, shielded, star quad, high flex audio cable P/N Belden 1192A.
5. Wiring and cable layout as shown.

Rev	Date	Originator	Description
01	6-15-05	NAK	original release
02	4-15-09	CJA	added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Cable, Iris to XLR 3pin female	
Dwg #	CA-D15M-X3F-L-A_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X3F-L-A	02		