



Cable Layout:

CA-D15M-X4F-L-C_02

6

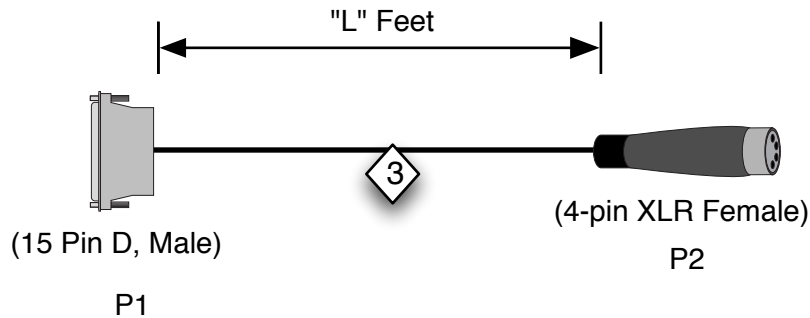

Wiring Information:

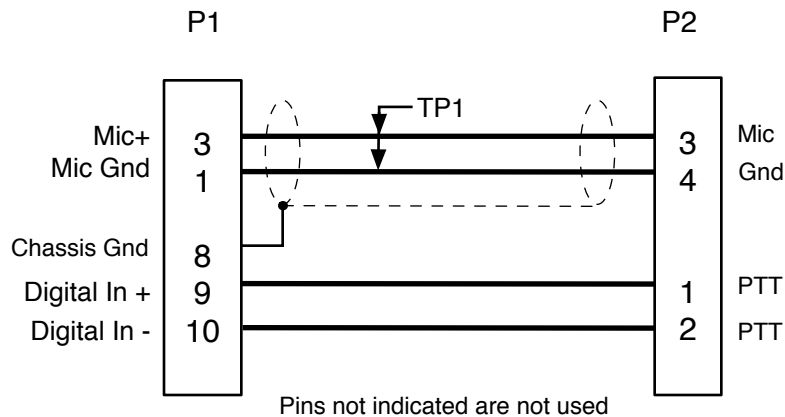


Notes:

1. P1: 15 pin DB-15 male connector: Use high quality supplier such as AMP or equivalent.
2. P2: Female XLR-4 connector.
3. Use low capacitance, shielded, star quad, high flex audio cable P/N Belden 1192A. Pair 1 (TP1) Blue and Blue w/White stripe, PTT use pair 2 White and White w/Blue stripe wire.
4. Tie ALL shields to Pin 8 at the D15 end. Shield no connect at P2 end.
5. Pairs must be connected as shown.
6. Cable length "L" defined by installation requirements.

***Application note: This cable is the -C variant for use with Electrovoice 903E hand-mics ONLY. Please confirm applicability for use with other hand-mics with ASTi engineering before use.**

Rev	Date	Originator	Description
01	7-15-08	NKW	Original release - for use with Electrovoice 903E hand mic
02	4-15-09	CJA	Added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Cable, Iris to XLR 4-pin female - see App Note	
Dwg #	CA-D15M-X4F-L-C_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X4F-L-5	02		