



Cable Layout:

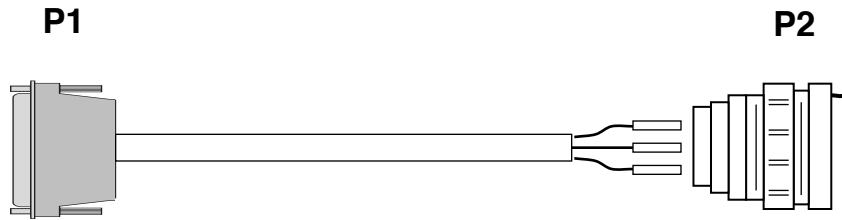

Requires 1.25-inch dia. minimum mounting hole.

See Switchcraft catalog for mounting details.


P/N: CA-D15M-X4FP-L-A_03



Length in Feet

Wiring Information:


Wiring Diagram
Pins Not Shown Are Unused

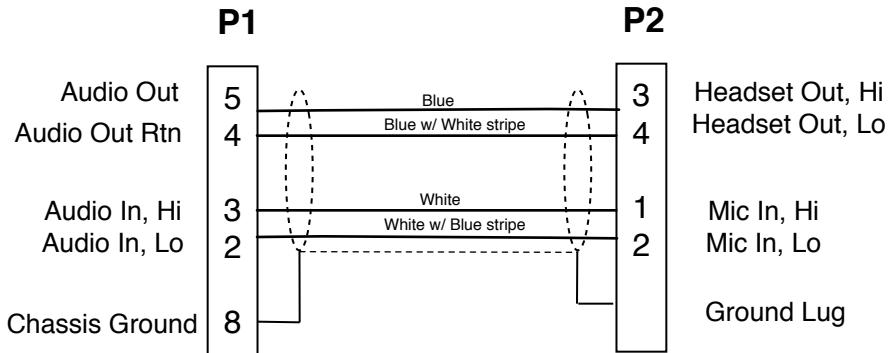

Assembly Notes

- (1) P1: Use male, metal, DB-15 connector. Connector to include backshell and male screwlock assembly.
- (2) P2: Use switchcraft P/N B4F (4pin XLR female, panel mount)
- (3) Use high quality, low capacitance, star-quad shielded audio cable Beldon 1192A or equivalent.
- (4) no substitutions for P1 and P2.

Rev	Date	Originator	Description
01	2-08-05	NAK	original release
02	11-15-07	NAK	Added connection to P1 pin4
03	4-15-09	CJA	Added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, Iris to Headset, Panel Mount	
Dwg #	CA-D15M-X4FP-L-A_03	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X4FP-L-A	03		