

Cable Layout:




CA-D15M-X6MP-L-A_02


Length in Feet

- Notes:**
1. Use high quality supplier such as AMP or equivalent.
 2. Use Neutrik connector only. No Substitutions. PN#: NC6MP
 3. Use quality low capacitance, high flex audio cable. Canare MR202-4AT audio cable is to be used.
 4. Cable length "L" defined by length field of part number ordered
 5. Tie ALL shields to Pin 8 at the D15 end. Tie ALL shields to the shield lug at the 6 pin XLR end. Pairs must be connected as shown

Wiring Information:

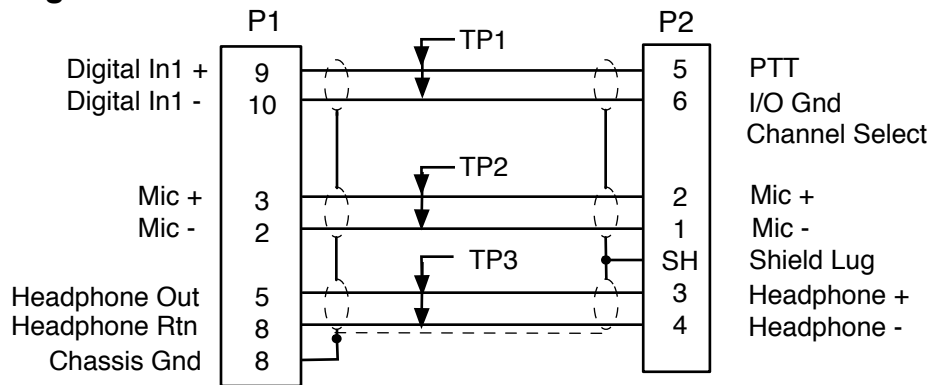

Rev	Date	Originator	Description
01	2-21-06	NAK	Original release
02	4-15-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVSFW3
Title	Audio Cable IRIS to 6-pin XLR Panel Mount
Dwg #	CA-D15M-X6MP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X6MP-L-A	02		