
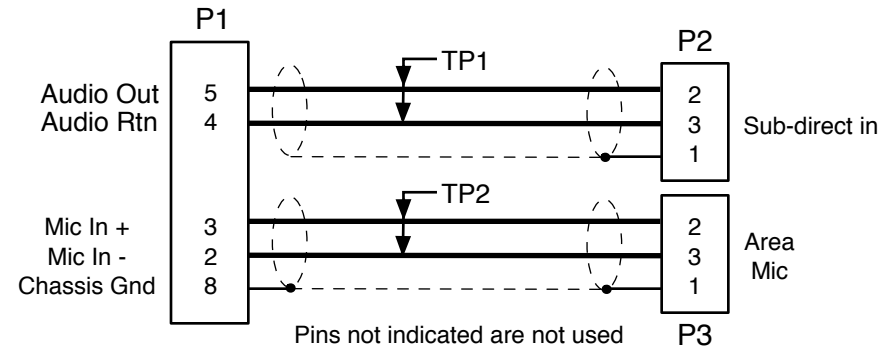



Length in feet

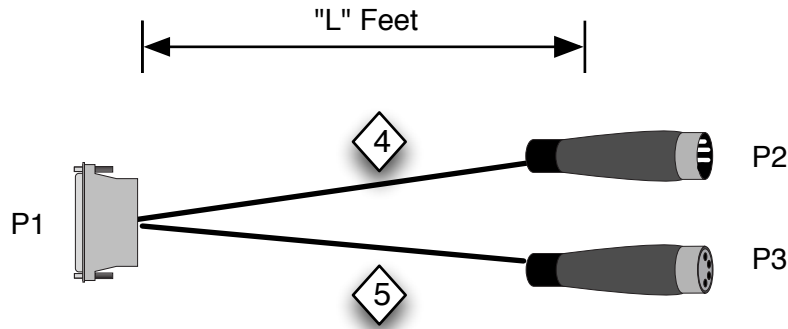

**Notes:**

1. P1: 15 pin DB-15 male connector: Use high quality supplier such as AMP or equivalent.
2. P2: Male inline XLR-3 connector.
3. P3: Female inline XLR-3 connector.
4. Use low capacitance, shielded, star quad, high flex audio cable P/N Belden 1192A. Pair 1 (TP1) Blue and Blue w/ White-stripe, pair 2 unused.
5. Use low capacitance, shielded, star quad, high flex audio cable P/N Belden 1192A. Pair 1 (TP2) Blue and Blue w/ White-stripe, pair 2 unused.
6. Pay attention to shield connections as shown.

Rev	Date	Originator	Description
01	5-8-06	NKW	Original release - for use with JBL subwoofer and Shure area mic
02	4-20-09	CJA	Added Information Table

 <b>ADVANCED SIMULATION TECHNOLOGY inc.</b> 500A Huntmar Park Drive, Herndon, VA 20170 <a href="http://www.asti-usa.com">www.asti-usa.com</a>	
Cage Code	OVFW3
Title	Audio Cable, Iris to XLR 3pin male & XLR 3pin female
Dwg #	CA-D15M-Y-X3M-X3F-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Y-X3M-X3F-L-A	02		