
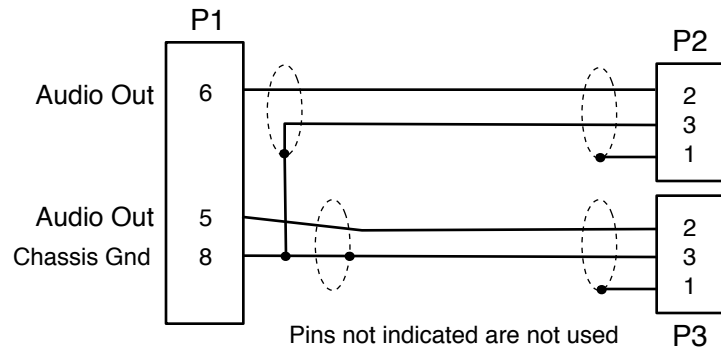



Length in feet

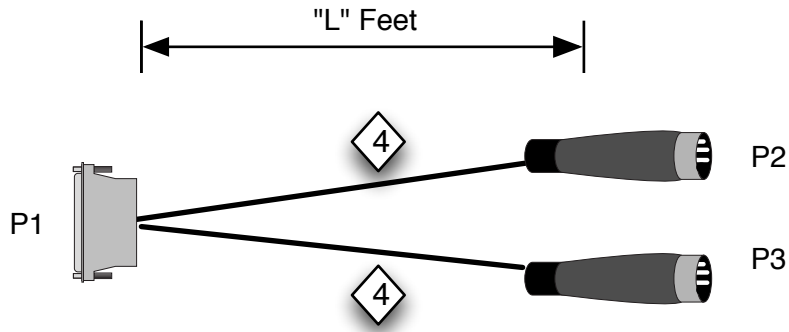

- Notes:**
1. P1: 15 pin DB-15 male connector: Use high quality supplier such as AMP or equivalent with strain relief and thumb screws.
 2. P2: Neutrik, Male inline XLR-3 connector.
 3. P3: Neutrik, Male inline XLR-3 connector.
 4. Use low capacitance, shielded, high flex audio cable P/N Belden L-2E5.
 5. Wire shield connections as shown.

Rev	Date	Originator	Description
01	06-26-06	NAK	Original
02	04-20-09	CJA	Added Information Table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Cable, Iris to dual XLR 3pin male	
Dwg #	CA-D15M-Y-X3M-X3M-L-A_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Y-X3M-X3M-L-A	02		