


P/N: CA-D9M-P3F-L-B_04

Length in Feet

① P1 DB-9 Male
②
③ P2 3.5 mm Female

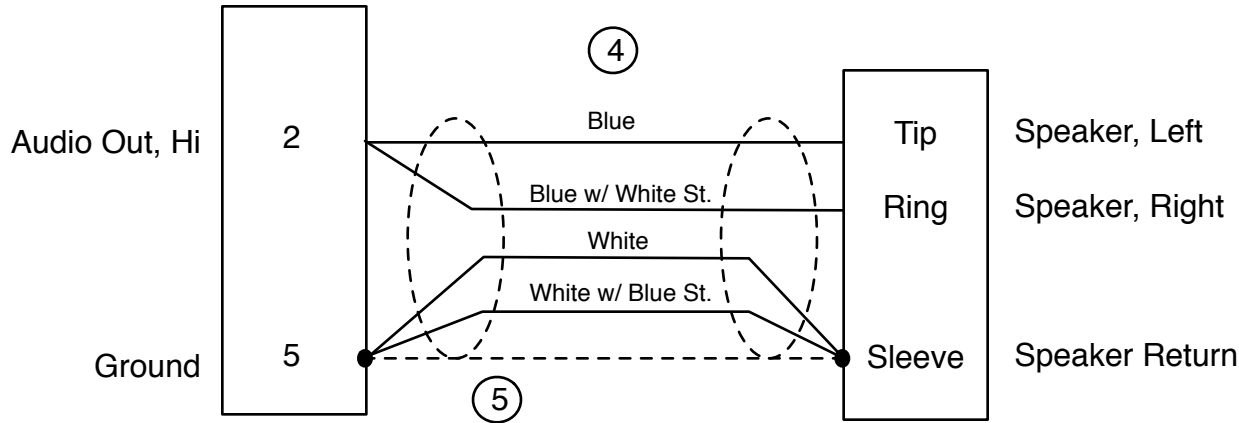

Assembly Notes

(1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief & male screwlock assembly.

(2) P1: pins 6 - 9 are unused and not shown.

(3) P2: Use 3.5mm, stereo, female. Metal Shell.

(4) Cable: Low capacitance, shielded star-quad cable Belden 1192A

(5) Grounds: connect cable drain wire to P1 and P2 as shown.

Notes:

1. Use this cable assembly to connect pair of standard PC speakers to a single RIU-V41 output.
2. Obsolete Part Number: ACBL-RIU-SPKRP.

Rev	Date	Originator	Description
01	2-22-00	NKW	Original Release
02	08-26-04	CEM	Fix PN (was P3M, now P3F) Adds mating plug diagram.
			Speaker rtn moved from RIU pin 7 to 5 (avoids shorting damage).
			Fixes P1 pin descr. (was Audio In, now Audio Out)
			P2 diagram fixed (was male plug, now female jack)
03	12-16-04	NAK	Changed cable type
04	4-1-09	CJA	Added Information Table

ADVANCED SIMULATION TECHNOLOGY inc.
500A Huntmar Park Drive, Herndon, VA 20170
www.asti-usa.com

Cage Code	OVSFW3
Title	Audio Interface Cable, - RIU to PC Speaker
Dwg #	CA-D9M-P3F-L-B_04
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-P3F-L-B	04		