



**Cable Layout:**

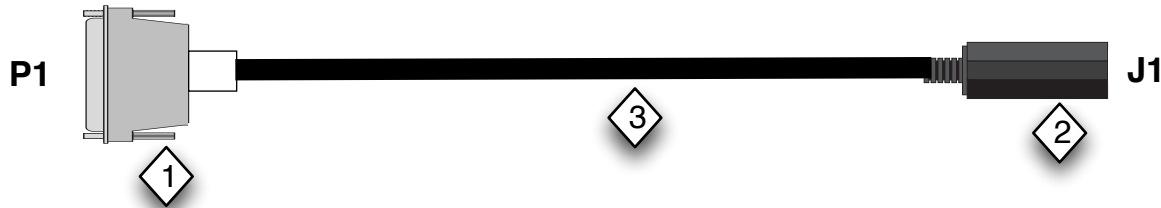

**CA-D9M-Q2F-L-A\_02**

*Length in Feet*


**Wiring Information:**

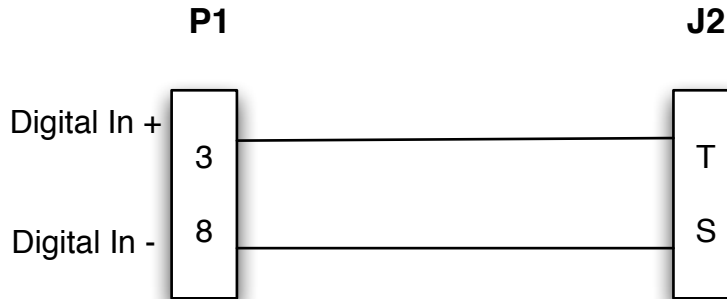

**Notes:**

- (1) Use high quality supplier such as AMP or equivalent
- (2) Use Switchcraft P/N XXX series or equivalent.
- (3) Use high flex. multi-conductor cable. Standard audio cable is acceptable. Larger jacketed cable may be required to provide tight fit with P1 backshell and J1 cable entry.
- (4) Apply shrink tubing as necessary to ensure tight fit at cable entry to P1 backshell and J1.

Rev	Date	Originator	Description
01	3/16/01	JPM	Original Release
02	4/3/09	CJA	Transferred to graffle and added information table

		<b>ADVANCED SIMULATION TECHNOLOGY inc.</b> 500A Huntmar Park Drive, Herndon, VA 20170 <a href="http://www.asti-usa.com">www.asti-usa.com</a>
Cage Code	OVFW3	
Title	Audio Interface Cable, RIU to 1/4" Phone Jack	
Dwg #	CA-D9M-Q2F-L-A_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Q2F-L-A	02		