


P/N: CA-D9M-Q2M-L-A_02


Length in Feet

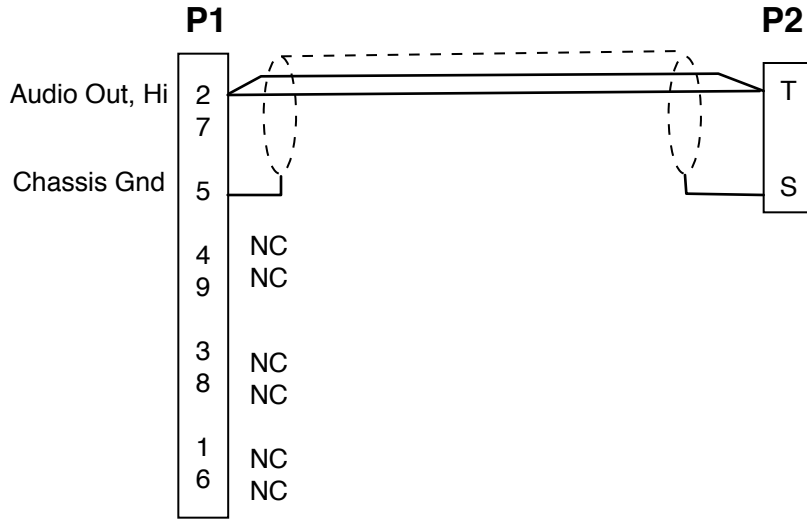

Assembly Notes

- (1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief & thumbscrew assembly.
- (2) P2: Male, 1/4-Inch Phone, 2 Conductor.
- (3) Cable: Low capacitance, shielded, high flex, audio cable. Canare P/N: L-2E5
- (4) Apply shrink tube if necessary to fill P2 cable entry hole.
- (5) Cable Length specified by value of L in P/N. Units are in feet.
- (6) Wire as shown in schematic - note drain wire connections.
- (7) Apply label "Caution, set RIU for single-ended use. See RIU manual". Apply clear heatshrink over label.

Rev	Date	Originator	Description
01	6-23-06	NAK	Original release
02	4-3-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3
Title	Audio Interface Cable, - RIU to 1/4" TS phono plug
Dwg #	CA-D9M-Q2M-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Q2M-L-A	02		