


P/N: CA-D9M-Q2M-L-B_02

Length in Feet

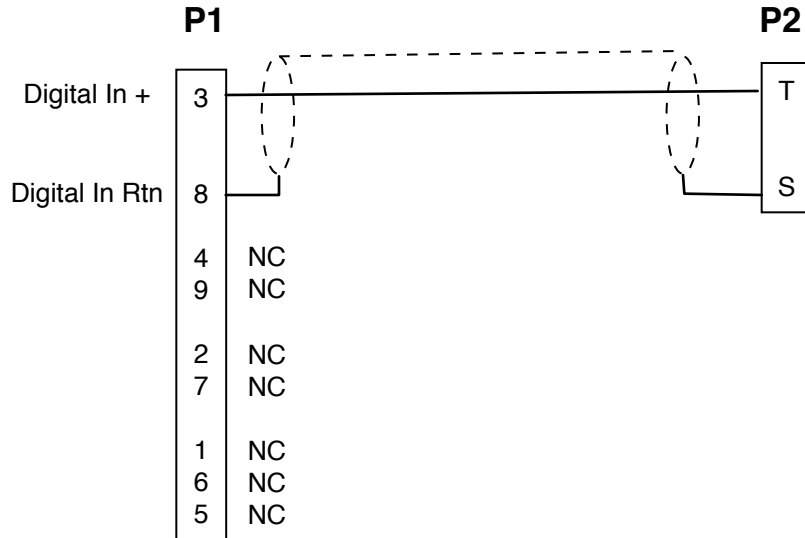


Assembly Notes

- (1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief & thumbscrew assembly.
- (2) P2: Male, 1/4-Inch Phone, 2 Conductor.
- (3) Cable: Low capacitance, shielded, high flex, audio cable. Canare P/N: L-2E5
- (4) Apply shrink tube if necessary to fill P2 cable entry hole.
- (5) Cable Length specified by value of L in P/N. Units are in feet.
- (6) Wire as shown in schematic - note drain wire connections.

*** Cable use: RIU to footswitch (or other switch) ***

Rev	Date	Originator	Description
01	11-13-06	NKW	Original release - RIU to footswitch
02	4-3-09	CJA	Added Information Table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, - RIU to 1/4" TS phono plug	
Dwg #	CA-D9M-Q2M-L-B_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Q2M-L-B	02		