



Cable Layout:

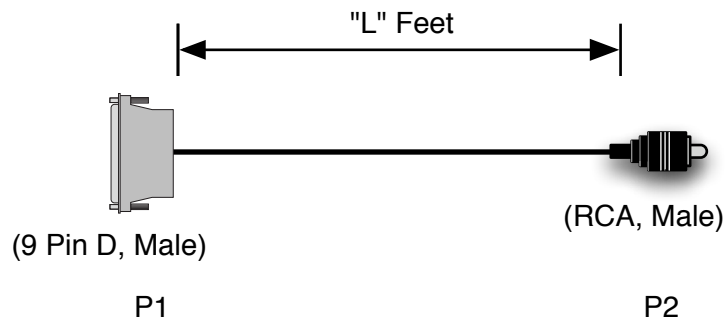

CA-D9M-R2M-L-A_03

Length in feet

Wiring Information:

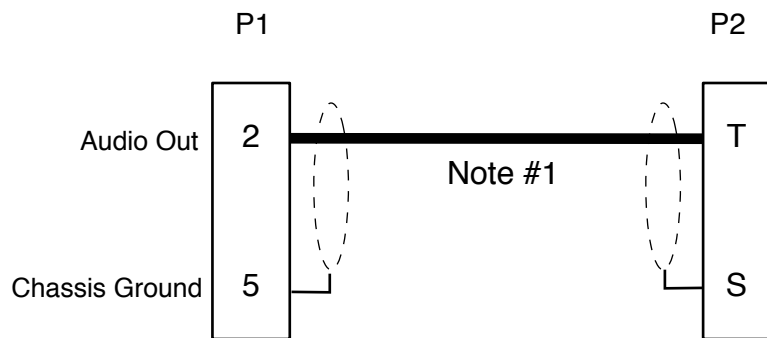


Pins not indicated are not used

Notes:

1. All four conductors are connected to pin 2 and to the tip of the RCA connector. Shield used as signal return
2. 9 pin DB-9 male connector: Use high quality supplier such as AMP or equivalent.
3. Male RCA connector: Use Switchcraft P/N 3502A or equivalent
4. Use low capacitance, shielded, star quad, high flex audio cable P/N Belden 1192A.
5. Wiring and cable layout as shown.

Rev	Date	Originator	Description
01	9-20-01	DEC	original release
02	3-17-05	NAK	Changed cable type and wiring configuration
03	4-1-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	Audio Cable, RIU to Phono Plug
Dwg #	CA-D9M-R2M-L-A_03
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-R2M-L-A	03		