



P/N: CA-D9M-X3M-L-B_04

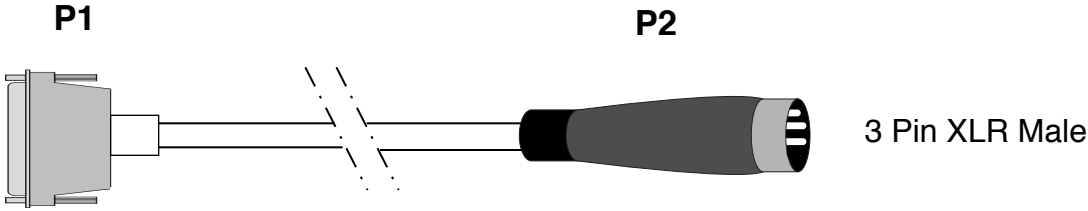

Length in Feet

Wiring Information

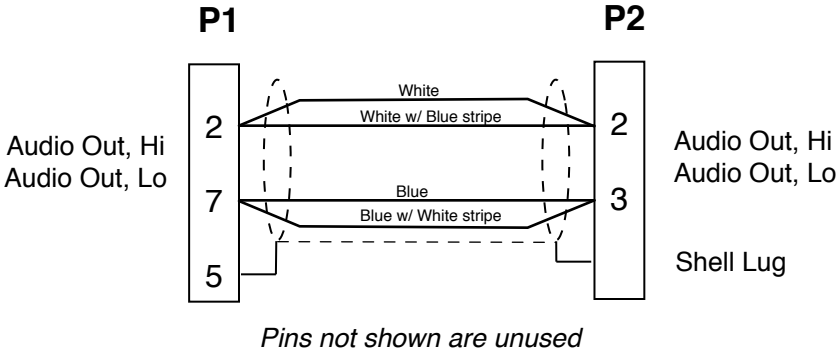


Assembly Notes

- (1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief & male screwlock assembly.
- (2) P2: Male, XLR, 3Pin, Neutrik
- (3) Cable: Low capacitance, shielded, star-quad, high flex, audio cable. Belden P/N: 1192A or equivalent
- (4) Wiring configuration as shown.
- (5) Note shield connections.

Notes:

1. This drawing identifies configurations for RIU to XLR 3 pin male audio interface cable. This would typically (but not exclusively) mate with a power amplifier or powered loudspeaker.

Rev	Date	Originator	Description
02	3/30/04	SEG	updated notes and P2-3, was incorrectly marked as 7
03	12/13/04	NAK	changed shielding & wiring connections, new cable type
04	4/6/09	CJA	added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, - RIU to 3-Pin Male XLR	
Dwg #	CA-D9M-X3M-L-B_04	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-X3M-L-B	04		