



Cable Layout:

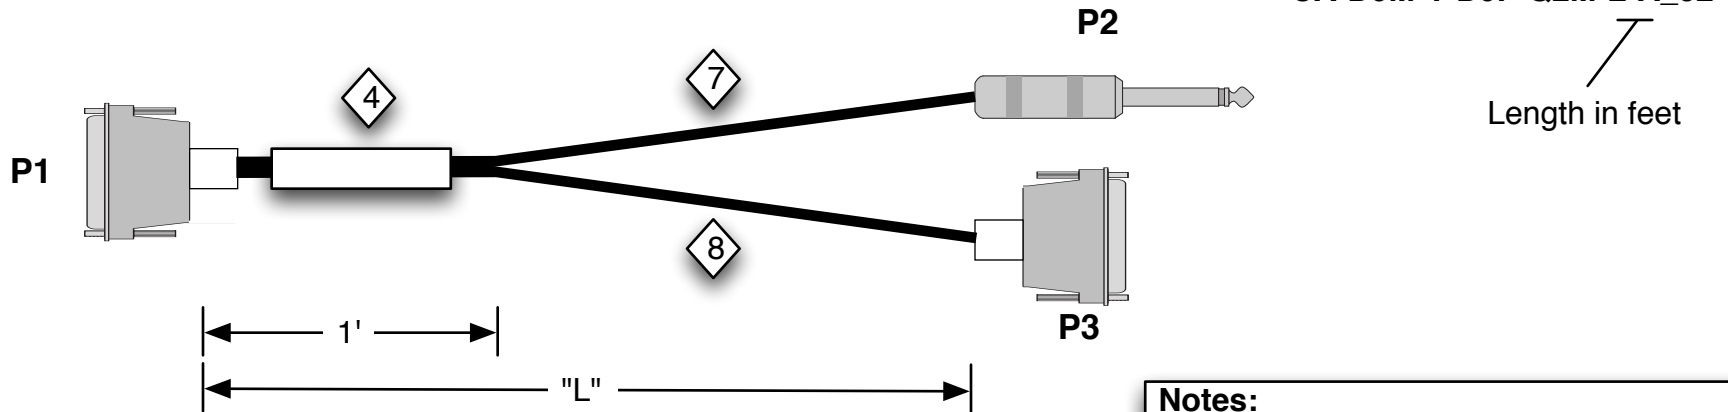


Wiring Information:

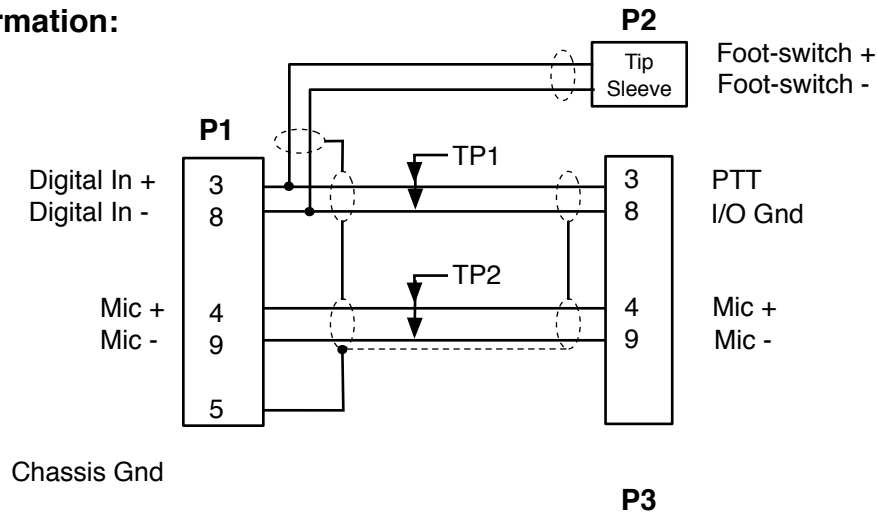

Notes:

1. P1 & P3: Use high quality supplier such as AMP or equivalent male D9 connector.
3. P2: 1/4" phono male connector
4. Apply clear heatshrink and label with cable part number
5. Cable length "L" defined by length field of part number ordered
6. Tie ALL shields to Pin 5 at the P1 end. Pairs must be connected as shown. Unused pairs are not connected.
- 7 Use Canare **L-2E5** audio cable.
- 8 Use Canare **MR202-2AT** audio cable.

Rev	Date	Originator	Description
01	03-24-09	NAK	Original release
02	04-07-09	CJA	Added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3		
Title	Audio Cable RIU to pedestal mic and Footswitch		
Dwg #	CA-D9M-Y-D9F-Q2M-L-A_02		
Sheet	1 of 1		

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Y-D9F-Q2M-L-A	02		