



Cable Layout:

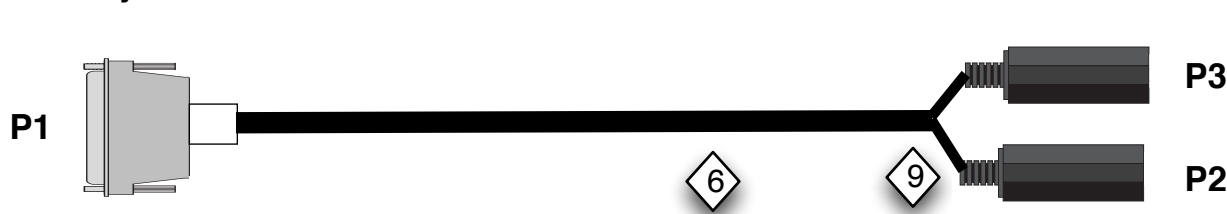


Wiring Information:

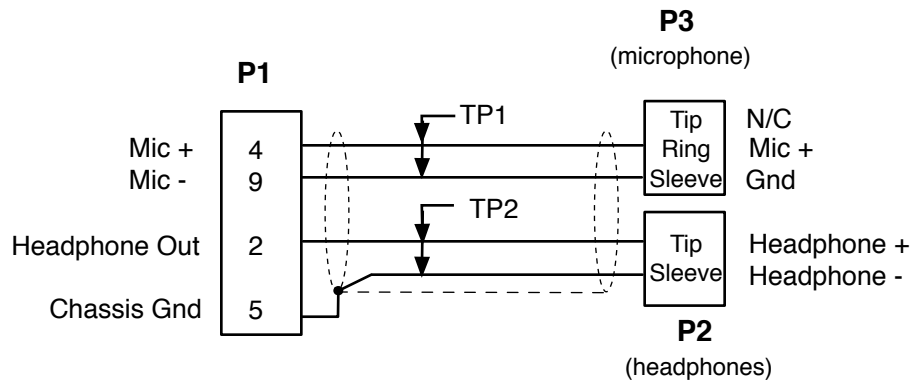

- Notes:**
1. P1: Male DB-9, use high quality supplier such as AMP or equivalent.
 2. P2: Use Switchcraft 0.25" type 80
 3. P3: Use Switchcraft 0.21" type S830
 6. Use 1192A star quad cable. Pair 1 (TP1) Blue and Blue w/ White-stripe, pair 2 (TP2) White and White w/ Blue-stripe.
 7. Cable length "L" defined by installation requirements.
 8. Tie ALL shields to Pin 9 at the D9 end. Pairs must be connected as shown.
 9. Distance from split to connectors should be approximately 6" and covered with black heatshrink.

Rev	Date	Originator	Description
01	5-15-07	NAK	Original release
02	4-1-09	CJA	Added information table



ADVANCED SIMULATION TECHNOLOGY inc.
 500A Huntmar Park Drive, Herndon, VA 20170
www.asti-usa.com

Cage Code	OVPFW3
Title	Audio Cable RIU to Headset
Dwg #	CA-D9M-Y-Q2F-Q3F-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Y-Q2F-Q3F-L-A	02		