


Note 4

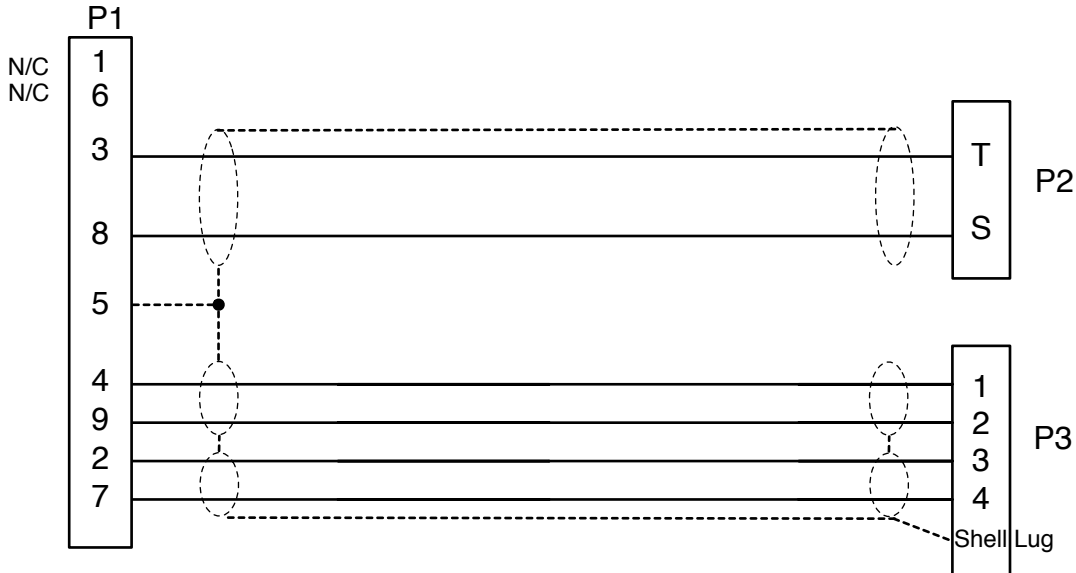

Assembly Notes

(1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief and male screwlock assembly.


(2) P2: 1/4" male Phono plug (T/S)

(3) P3: Female, XLR, 4pin, black chrome shell, gold contacts, strain relief. Neutrik P/N: NC4FX-B

(4) Cable length specified by value of L in P/N. Units are in feet

(5) Wire as shown in schematic - note drain wire connections.

(6) Use Canare MR202-4AT audio cable

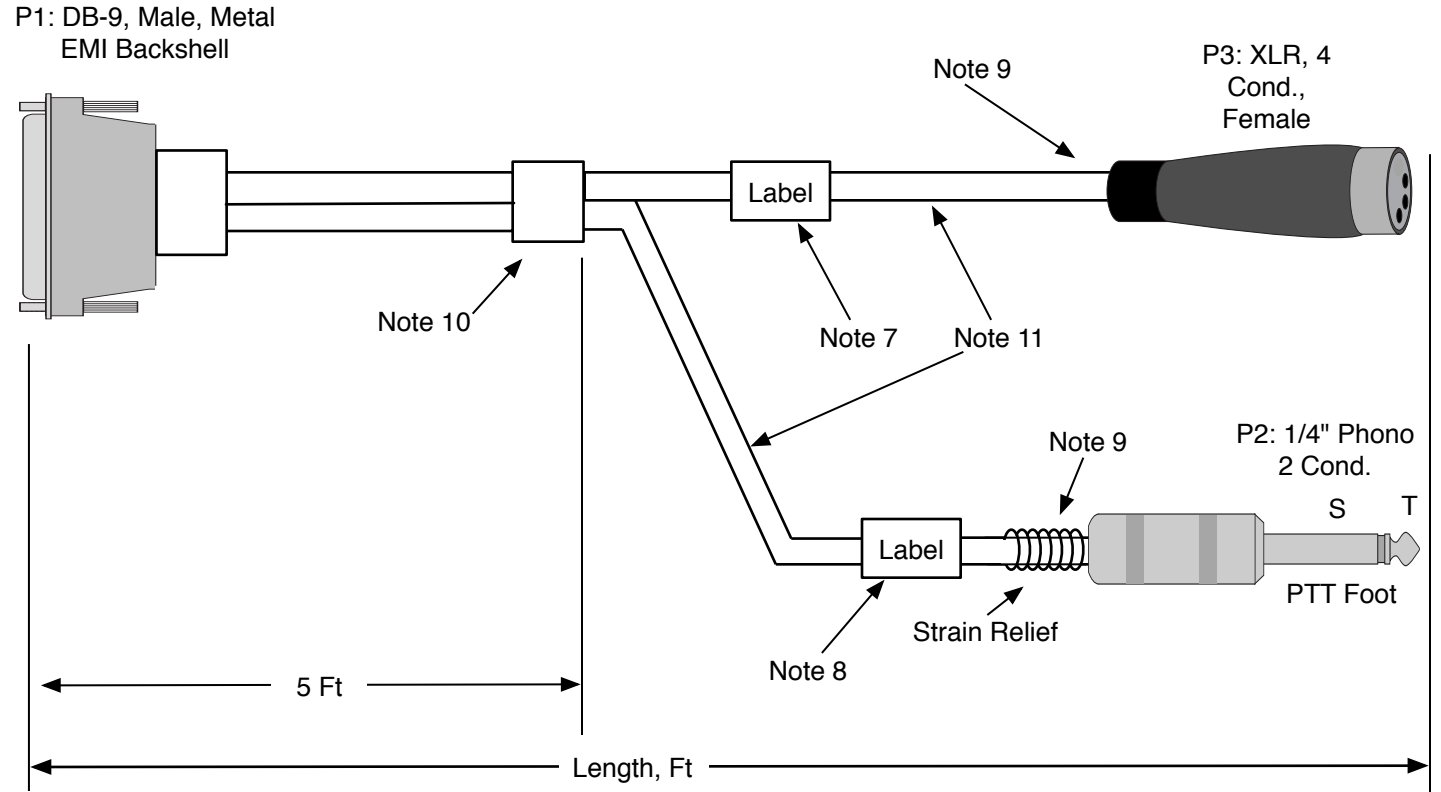

Assembly Notes, Cont.

(7) Apply label: HEADSET


(8) Apply label: FOOTSWITCH


(9) Apply Shrink tubing as required to fill connector cable entry

(10) Apply shrink tubing as required tying cables together

(11) Apply black flex sleeving

Rev	Date	Originator	Description
03	7/14/06	NAK	Added note about flex sleeving and cable type
04	4/8/09	CJA	Added Information Table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	Audio Cable RIU to Footswitch & Headset
Dwg #	CA-D9M-X4F-Q2M-L-C_04
Sheet	1 of 2

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	Audio Cable RIU to Footswitch & Headset
Dwg #	CA-D9M-X4F-Q2M-L-C_04
Sheet	2 of 2

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Y-X3F-Q2M-L-C	04		