


**Cable Layout:**

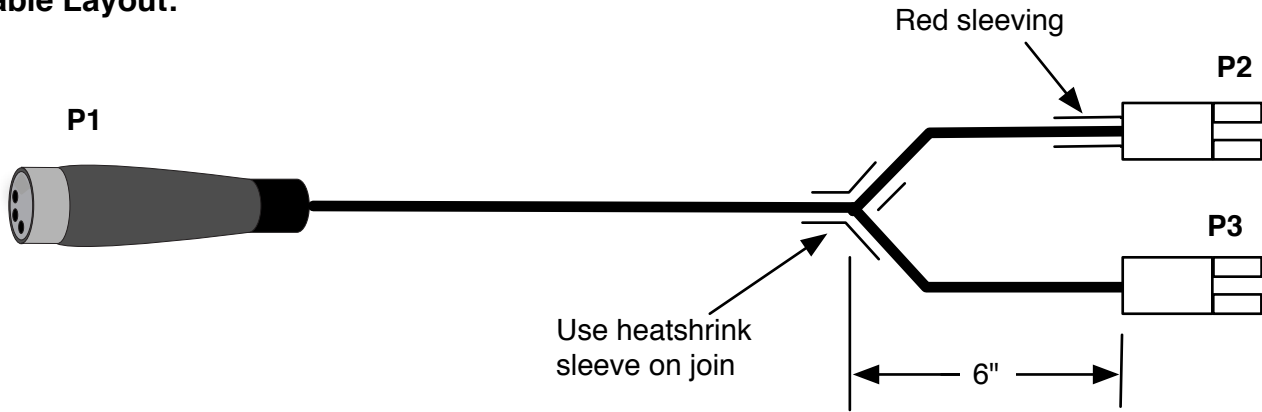

**P/N: CA-X3F-Y-2TL-L-A\_02**

*Length in Feet*

**Wiring Information:**

From	To
P1-2	P2
P1-3	P3
P1-1	N/C



Available in lengths: 1ft, 5ft, 10ft, 15ft, 25ft


**Assembly Notes:**

1. P1: Use female, 3pin, In-Line XLR connector.
2. Use high quality speaker grade 18AWG (or better) pair cable.
3. P2, P3 : Standard 'Red' 0.25" spade terminals
4. Y-point should be 6" from P2/P3 cable end and include appropriate heatshrink sleeving (or accepted joining sleeve to ensure secure join).
5. P2 connector should be identified with the red sleeve for polarity clarity

**Notes:**

1. This Drawing identifies configuration an XLR 3 pin female to twin terminal lug audio interface cable. This would typically (but not exclusively) mate a power amplifier to a loudspeaker.

Rev	Date	Originator	Description
-	11/02/00	NKW	Original Release
02	04/21/09	JBN	Added chart, made pretty, converted to .graffle

 <b>ADVANCED SIMULATION TECHNOLOGY inc.</b> 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPFW3
Title	Audio cable - 3 -pin Female XLR to 2 terminal lugs
Dwg #	CA-X3F-Y-2TL-L-A_02
Sheet	1 of 1

Industry Connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Use Case	Special Notes
XLR3	X3*		CA-X3F-2TL-L-A	02		