



Cable Layout: ⑤

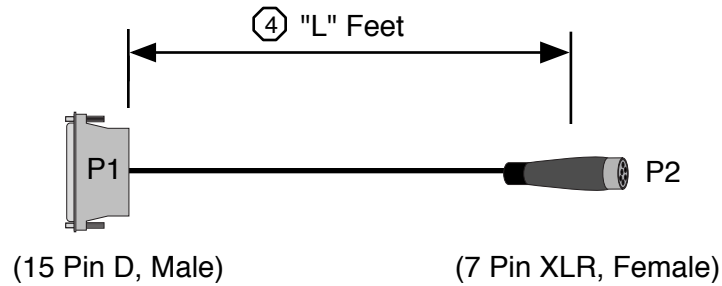

Wiring Information: ⑤

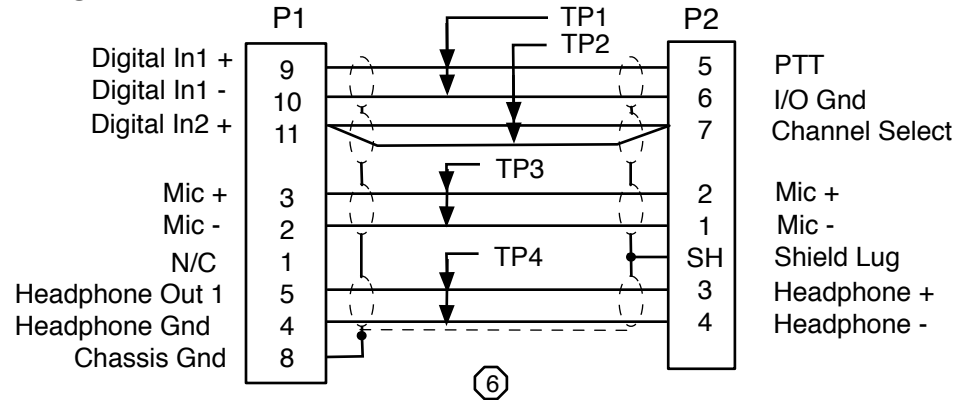


Parts List:

Item	Qty	Reference	P/N	Mfg	Description	Notes
1	1	P1	XXX-XXXX	XXXXXXX	15-pin Male D-shell	1
2	1	P2	A7F	Switchcraft	7-Pin Female XLR	2
3	AR	-	MR202-4AT	Canare	Audio Cable	3

Notes:

- ① Use high quality supplier such as AMP or equivalent.
- ② Use Switchcraft connector only. No Substitutions.
- ③ Use best quality low capacitance, high flex audio cable. Advise ASTi if other than Canare MR202-4AT audio cable is to be used.
- ④ Cable length "L" defined by length field of part number ordered
- ⑤ Wiring and cable layout as shown.
- ⑥ Tie ALL shields to Pin 8 at the D15 end. Tie ALL shields to the shield lug at the 7 pin XLR end. Pairs must be connected as shown

Rev	Date	Originator	Description
-	7-5-04	JPM	Original release
01	9-2-04	PSH	Update to swap MIC + and MIC - on P2 connector
02	11-9-04	NAK	New cable type, tied all shields to chassis ground, Mic Gnd - N/C
03	12-17-04	NAK	Changed cable type
04	4-15-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3
Title	Audio Cable IRIS to 4 Channel PTT Unit
Dwg #	CA-D15M-X7F-L-C_04
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X7F-L-C	04		