



**Cable Layout:**

**P/N: CA-D37M-(8)X3F-(8)X3M-L-A\_04**





Length in Feet

P1, 37 Pin D,  
Male, Metal  
Connector  
with  
Backshell




Use Individually  
Shielded Twisted Pair Wire

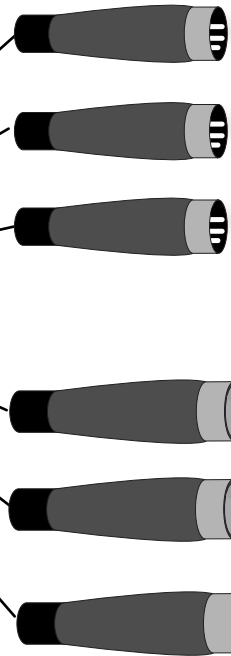

P2 Out 1 P2, In line 3 Pin Male XLR Black  
 P2 Out 2  
 P2 Out 8  
 P3 In 1 P3, In line 3 Pin Female XLR Red  
 P3 In 2  
 P3 In 8

→ Audio Out  
 ← Audio in



Rev	Date	Originator	Description
01	01/01/98	SEG	original release
02	09/16/04	MED	Updated audio output pinouts
03	03/21/05	NAK	Updated audio output pinouts
04	03/31/09	JBN	changed number and made it pretty



**ADVANCED SIMULATION TECHNOLOGY inc.**  
 500A Huntmar Park Drive, Herndon, VA 20170  
[www.asti-usa.com](http://www.asti-usa.com)


Cage Code	OVPW3
Title	XLR Breakout Cable
Dwg #	CA-D37M-(8)X3F-(8)X3M-L-B_04
Sheet	1 of 2

# Wiring Information:

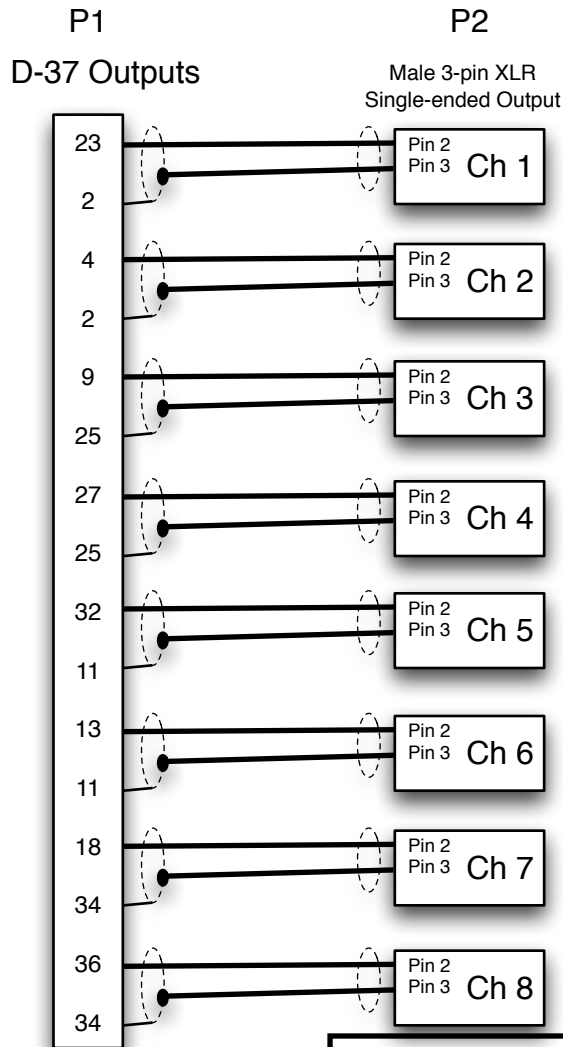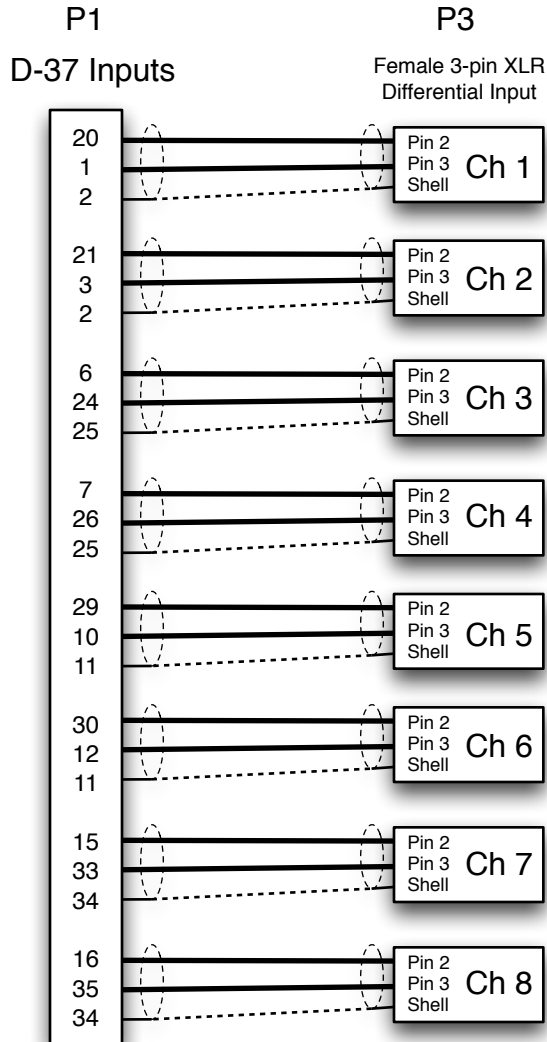

**Notes:**  
 1. Pins/Connections not explicitly shown are not used

Rev	Date	Originator	Description
01	01/01/98	SEG	original release
02	09/16/04	MED	Updated audio output pinouts
03	03/21/05	NAK	Updated audio output pinouts
04	03/31/09	JBN	changed number and made it pretty



ADVANCED SIMULATION TECHNOLOGY inc.  
 500A Huntmar Park Drive, Herndon, VA 20170  
[www.asti-usa.com](http://www.asti-usa.com)

Cage Code	OVFW3
Title	XLR Breakout Cable
Dwg #	CA-D37M-(8)X3F-(8)X3M-L-B_04
Sheet	2 of 2

Industry Connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Use Case	Special Notes
DB37	D37*	8AFA Card	CA-D37M-(8)X3F-(8)X3M-L-A	04		