

Cable Layout:

CA-D37M-PNL-L-C_02


48 inch length
(Approximate)

Use Individually
Shielded Twisted Pair Wire
(Wiring Info on Next Page)

Male DB37 Metal
Connector
With Backshell

→
To DACS


XLR connectors to Headsets

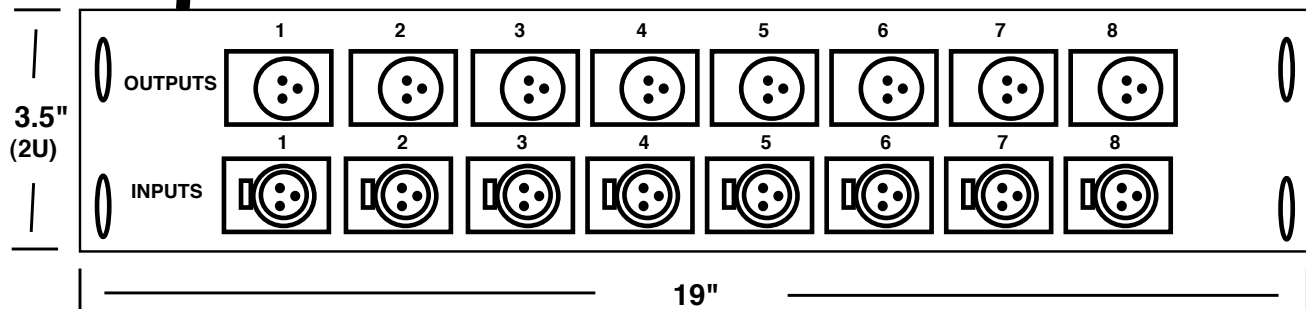

Notes:
 1. Output connectors are industry standard 3 pin, male XLR.
 2. Input connectors are industry standard 3 pin, female XLR.
 3. Panel is 19" rack mountable, 2U (3.5") high.


Wiring Information:

CA-D37M-PNL-L-C_02

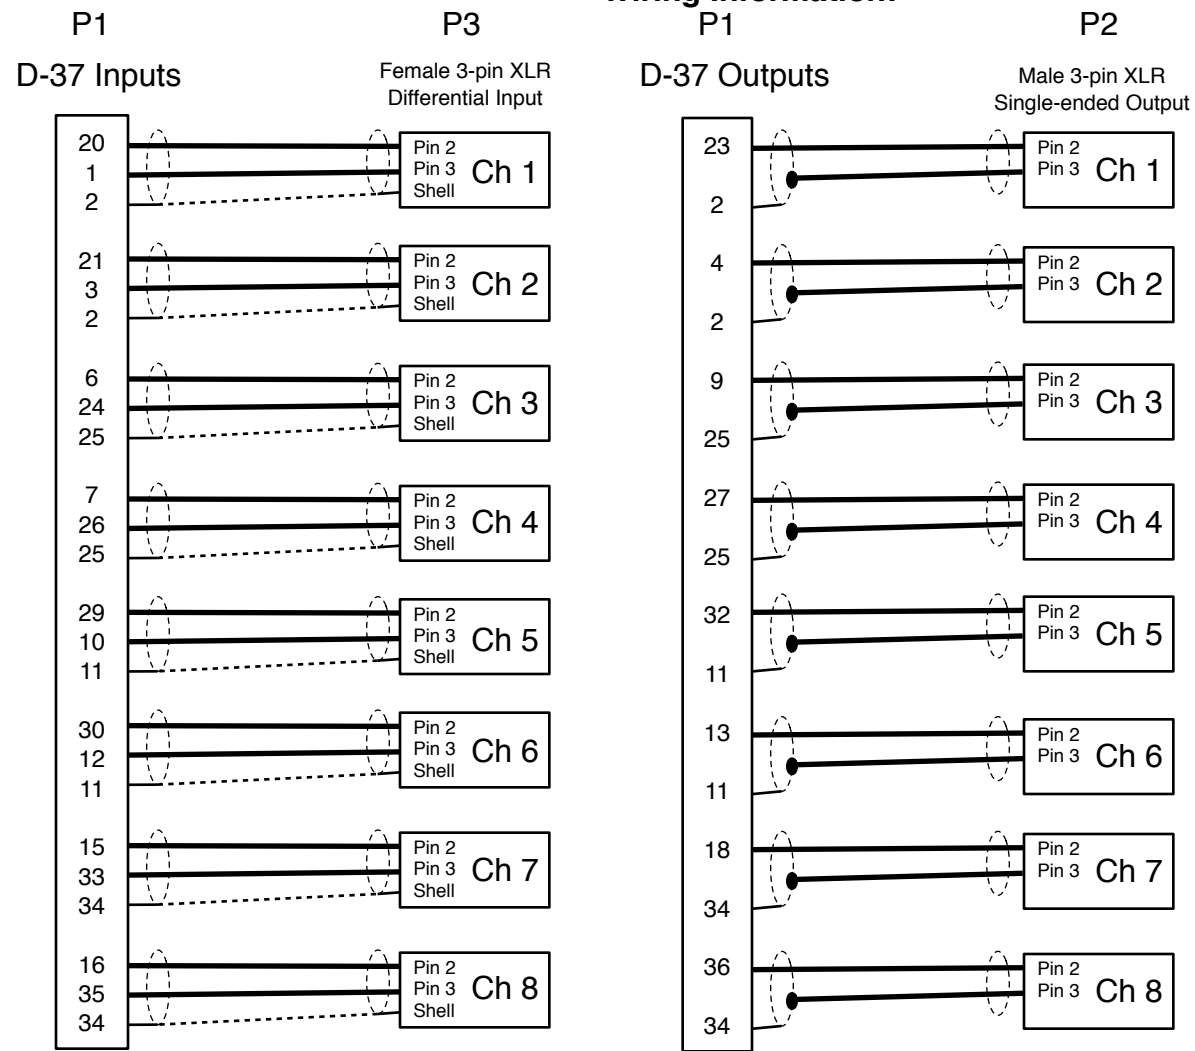


Notes:
 1. Pins/Connections not explicitly shown are not used

Rev	Date	Originator	Description
01	05/30/07	NAK	Original release with new part number and wiring configuration
02	04/01/09	JBN	Changed and added chart, made pretty

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	XLR Breakout Cable
Dwg #	CA-D37M-PNL-L-C_02
Sheet	1 of 2

Rev	Date	Originator	Description
01	01/01/98	SEG	original release
02	09/16/04	MED	Updated audio output pinouts
03	03/21/05	NAK	Updated audio output pinouts
04	04/01/09	JBN	Added table and made pretty

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	XLR Breakout Cable
Dwg #	CA-D37M-PNL-L-C_04
Sheet	2 of 2

Industry Connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Use Case	Special Notes
DB37	D37*	8AFA Card	CA-D37M-PNL-L-C	02		