


P/N: CA-D9M-Q2M-L-C_02

Length in Feet

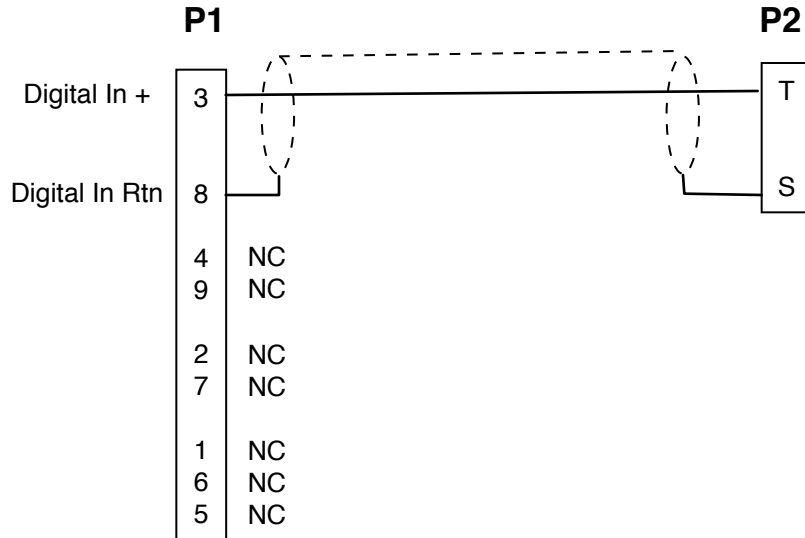

Assembly Notes


- (1) P1: Use male, metal, DB-9 connector. Includes metal chrome backshell, and male screwlock assembly.
- (2) P2: Use 1/4", **mono**, 2 Conductor **plug**. Switchcraft P/N 280 or Equivilant
- (3) Cable: High quality, Low capacitance, audio cable. Whirlwind Accousonic +1 or Equivalent

Notes

- (4) DI Cable
- (5) Use for RIU toBoss Footswitch FS-5U

*** Cable use: RIU to footswitch (or other switch) ***

Rev	Date	Originator	Description
-	6-3-00	JPM	Original release
C	9-25-01	CEM	Modified for use with Footswitch, add dimension(L), add label notes, add usage notes
02	4-2-3-09	CJA	Added information table

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, - RIU to PTT Footswitch	
Dwg #	CA-D9M-Q2M-L-C_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-Q2M-L-C	02		