


**P1**

**P2**


**P/N: CA-D9M-X3FP-L-A\_02**

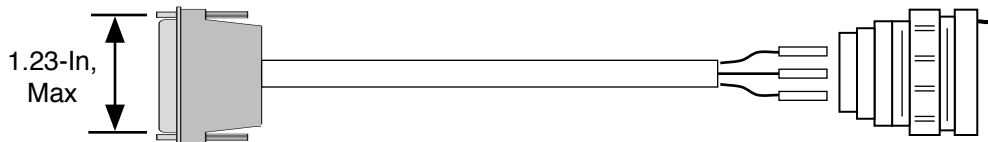

1.23-In,  
Max

Requires 1.25-inch dia.  
minimum mounting hole.


See Switchcraft catalog for  
mounting details.



*Length in Feet*

**Wiring Diagram**


*Pins Not Shown Are Unused*

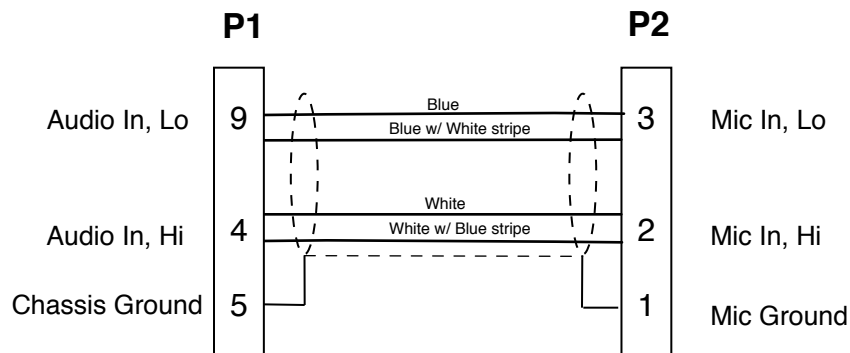

**Assembly Notes**

- (1) P1: Use male, metal, DB-9 connector. Connector to include backshell and male screwlock assembly with thumb screws.
- (2) P2: Use switchcraft P/N B3F (3pin XLR female, panel mount)
- (3) Use high quality, low capacitance, star-quad shielded audio cable Beldon 1192A or equivalent.
- (4) no substitutions for P1 and P2.

Rev	Date	Originator	Description
01	10-25-07	NAK	original release
02	4-6-09	CJA	Added Information Table

 <b>ADVANCED SIMULATION TECHNOLOGY inc.</b> 500A Huntmar Park Drive, Herndon, VA 20170 <a href="http://www.asti-usa.com">www.asti-usa.com</a>	
Cage Code	OVSFW3
Title	Audio Interface Cable, RIU to Headset, Panel Mount
Dwg #	CA-D9M-X3FP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-X3FP-L-A	02		