


Length in Feet

Requires 1.25-inch dia. minimum mounting hole.
See Switchcraft catalog for mounting details.


Wiring Diagram
Pins Not Shown Are Unused

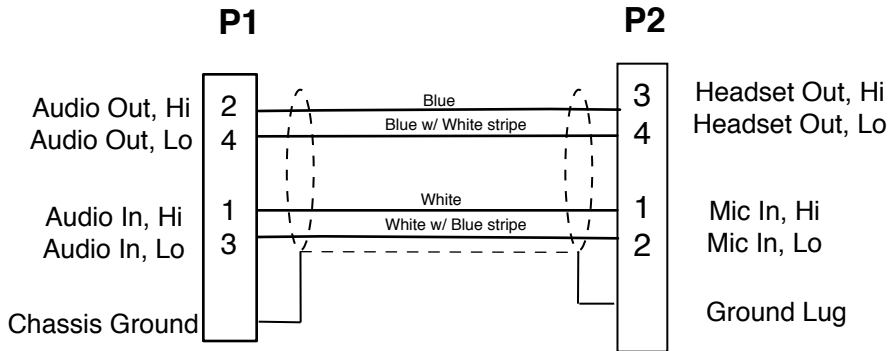

Assembly Notes

- (1) P1: 4-Pin Mini-DIN Plug
- (2) P2: Use switchcraft P/N B4F (4pin XLR female, panel mount)
- (3) Use high quality, low capacitance, star-quad shielded audio cable Beldon 1192A or equivalent.
- (4) no substitutions for P1 and P2.

Rev	Date	Originator	Description
01	2-10-05	NAK	original release
02	4-13-09	CJA	added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVPW3
Title	Audio Interface Cable, AIU to XLR4, Panel Mount
Dwg #	CA-M4M-X4FP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
M4M	M4*		CA-M4M-X4FP-L-A	02		